



## 0-445-10 - 10-30V Ultra Low Profile Magnetic Beacon with 3.8M Cable and Cigarette Plug

Durite Ultra Low Profile Magnetic Beacon with 3.8M cable and cigarette plug. Ultra Low Profile Beacon with 13 flash patterns. 10-30v, 14 x 3W (42W Max) Amber LED's. Speed rated 70MPH.


E Marked R65 + R10 EMC.



## TECHNICAL SPECIFICATIONS

Type	Ultra Low Profile Beacon, magnet base (70MPH RATED)
Voltage	10-30VDC
LED's	14 x 3W
Power	42W (Max Power)
Current Draw	2.0 A@ 12V/ 1.0A @ 24V (Max Current)
IP Rating	IP65
Material Construction	ABS Base with PC Lens.
Weight	0.650Kg
Dimensions	Please see below
Operating Temperature	-30°C to +50°C
Certificate	CE, E Mark R65 + R10 EMC

## TECHNICAL DRAWING / FLASH PATTERNS

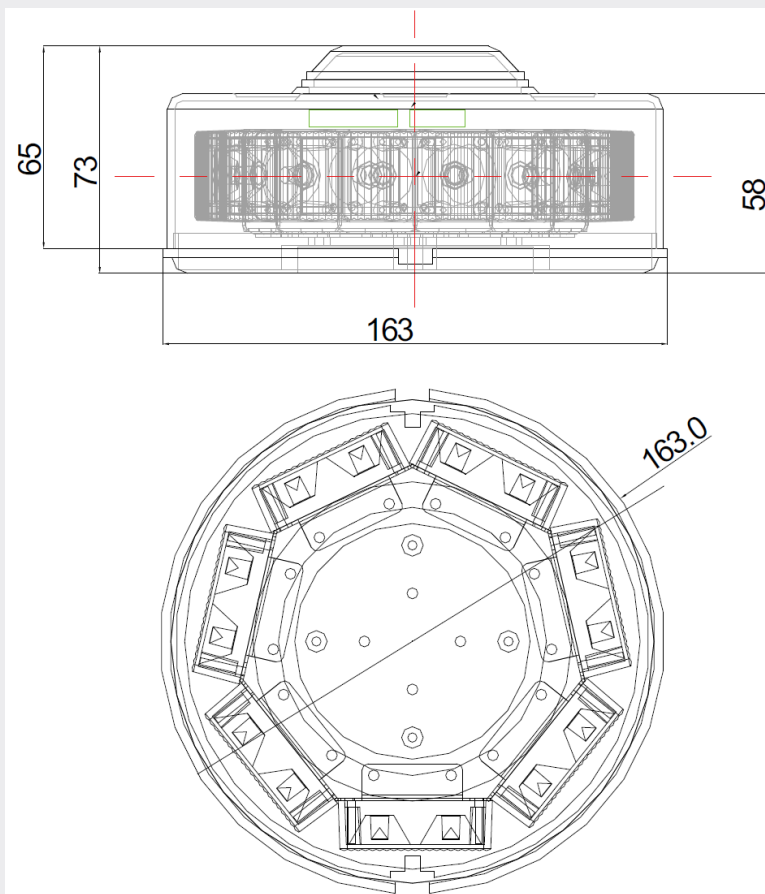

FLASH FUNCTIONS
1. Single Flash
2. Triple Flash
3. Rotating
4. Left and right Multi Flash Alternating Group
5. Octa Flash
6. Single Flash-Slow
7. Left and right quintuple Flash Alternating Group
8. Cross and Multi Flash Alternating Group
9. Sextuple Flash clockwise
10. Sextuple Flash anti-clockwise
11. Cross and Quad Flash Alternating Group
12. Automatically Single Flash, left and right quintuple flash Alternating Group
13. Automatically Single Flash and Octa flash